



博洲龙®
BOZHOU LONG

BROLONG®

WENLING BOLONG

MECHANICAL & ELECTRICAL CO.,LTD.

Lithium Battery Fuel Pumps Series
Fuel Transfer Pump Series
Grease Distribution Equipment Series
Pneumatic Lubricating Oil Pump Series
Fuel Tank Series



WENLING BOLONG MECHANICAL & ELECTRICAL CO.,LTD.

📍 Add: Dianxia Village, Daxi Town, Wenling, Zhejiang 317525, China

☎ Tel: +86-576-86339990

📠 Fax: +86-576-86339211

✉ E-mail: sales@bozhoulong.com

🌐 http://www.bozhoulong.com

博洲龙
BOZHOU LONG

COMPANY PROFILE

Wenling Bolong Mechanical & Electrical Co., Ltd is a fuel transfer solutions manufacturer that specialized in manufacturing, selling and servicing of Oil Pump, Fuel Dispenser, Flow Meter, Nozzle and accessories etc. Meanwhile, we also produce some Submersible Water Pump and Solar Pump for agricultural irrigation system. Established in 2002 and located in "hometown of pump": Daxi town, Wenling City, Zhejiang Province, China.

Thanks to science and technology for development, Bolong constant pursuit is providing customers from all over the world with advanced products. Business range covered overseas and domestic market.

Here always keeping the launch of new products to widely usage in different fields. Adhered to professional development since the establishment, obtained the international and domestic market with leading technology, superb solutions and full technical service concept for transferring of fuels and liquids. All of the pumps comply with CE, RoHS certification. We constantly focused on the consideration for human and environmental health.

Sincerely welcome friends from all over the world, with the necessary professionalism and integrity to build stable, long-lasting relationships, conducted to brilliance future for each other.



WENLING
BOLONG
MECHANICAL & ELECTRICAL CO.,LTD.

catalogue

Lithium Battery Fuel Pumps Series
..... P01

Fuel Transfer Pump Series
..... P01

Grease Distribution Equipment Series
..... P03

Pneumatic Lubricating Oil Pump Series
..... P04

Fuel Tank Series
..... P05-12

LITHIUM BATTERY FUEL PUMPS

DYB-40B Lithium Battery Fuel Pumps

Progressive powered by Lithium Battery System, without external power supply.

Portable advantage exquisite design easy to carry and not limited conventional AC power supply.

Avoid the constant power consumption problem of outdoor.

Enable variety environment usage.

TECHNICAL DATA

Voltage	18V
Power	160W
Flow Rate	40L/min
Speed	3200rpm
Head	10m
Time	2.0 (15min) , 4.0 (30min) , 6.0 (45min)



DYB-40B

DC FUEL TRANSFER PUMP

Electric self-priming compact portable rotary vane pump.

Built-in bypass valve design for safe and dependable fuel delivery.

Available to equip with fuel transfer accessories: Flow meter,

Nozzle and stationary installations.

TECHNICAL DATA

Voltage	12/24V
Power	300W
Flow Rate	55L/min
Speed	2800rpm
Head	14m



DYB-50UJ

APPENDIX

GREASE DISTRIBUTION EQUIPMENT

These are industrial piston pumps suitable for transferring grease and thick oil at high pressure, over both short and long distances, thanks to the high compression ratio.



BL-8QA-12L



BL-8QA-20L



BL-50Q-40L



BL-16Q-40L

TECHNICAL DATA												
MODEL	DRUM CAPACITY	PRESSURE RATIO	WORKING PRESSURE	MAX.FLUID PRESSURE	CYLINDER DIA	AIR CONSUMPTION	MAX.FREE FLOW RATE	SUCTION TUBE DIAMETER	SUCTION TUBE LENGTH	INLET/OUTLET	GROSS WEIGHT	PACKAGE VOLUME
BL-8QA-12L	12KG	50:1	5-8bar	400bar	70mm	8bar 120L/min	800g/min	30mm/ 1.20'	400mm/ 17.5'	1/4'	11.1kg	345*305*820mm
BL-8QA-20L	20KG	50:1	5-8bar	400bar	70mm	8bar 120L/min	800g/min	30mm/ 1.20'	440mm/ 17.5'	1/4'	14kg	355*330*785mm
BL-16Q-40L	40KG	55:1	5-8bar	440bar	108mm	8bar 150L/min	1300g/min	32mm/ 1.20'	440mm/ 17.5'	1/4'	19.8kg	415*415*855mm
BL-50Q-40L	40KG	80:1	5-8bar	600bar	80mm	8bar 120L/min	800g/min	30mm/ 1.20'	440mm/ 17.5'	1/4'	16.2kg	400*400*815mm

PNEUMATIC LUBRICATING OIL PUMP

This is an oil piston pump, suitable for transferring medium viscosity oil over short distances. It is manufactured using selected materials to ensure high performance and durability.



BL-940A

TECHNICAL DATA	
Weight:	8kg
Pressure ratio:	5:1
Work pressure:	5-8bar
Oil delivery rate:	34L/min
Inlet size:	1/4"
Oil outlet size:	1/2"
Gas consumption:	8bar150L/Lmin
Bucket range:	180-200kg
Maximum oil pressure:	40bar
Oil suction pipe length:	940mm/37"
Oil suction pipe diameter:	50mm/1.97"
Cylinder diameter:	108mm
Packaging size:	195x185x1335mm



BL-940B

TECHNICAL DATA	
Weight:	6kg
Pressure ratio:	3:1
Work pressure:	5-8bar
Oil delivery rate:	12L/min
Inlet size:	1/4"
Oil outlet size:	1/2"
Gas consumption:	8bar110L/Lmin
Bucket range:	180-200kg
Maximum oil pressure:	24bar
Oil suction pipe length:	940mm/37"
Oil suction pipe diameter:	50mm/1.97"
Cylinder diameter:	70mm
Packaging size:	155x150x1735mm



BL-94C

TECHNICAL DATA	
Drum capacity	180-220kg
Pump No.	BL94A
Air regulator	91015
Digital control gun	90203N
Connection hose	90901-3
Drum trolley	90304A
Oilhose reel	/
Weight	31kg
Package volume	815×675×145mm 155×150×1265mm



BL-940D

TECHNICAL DATA	
Pump No.	BL940A
Drum capacity	180-200kg
Trolley	90305A
Digital control oll gun	90203N
Hose reel	TT500C1
Weight	76kg
Package volume	965×665×185mm 195×185×1135mm 450×240×573mm


FUEL TANK



DIESEL FUEL TANK

High-performance Rotational Moulding Diesel Fuel Oil Storage and Delivery KIT

- Pump 50 L/min flow rate with 30min duty cycle
- Hose and nozzle protect from padlock cover
- NBR delivery hose with crimped fittings
- Automatic Nozzle
- Fuel level indicator
- Impact Resistant Design
- Optional built-in battery power

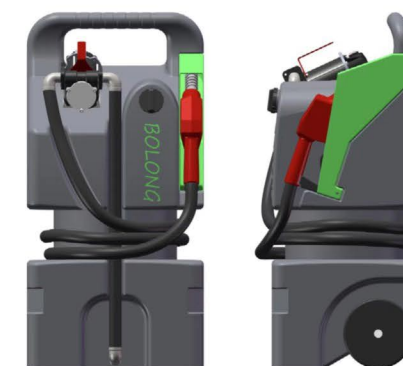

DT-60



DT-120

TECHNICAL DATA

ITEM NO.	CAPACITY	VOLTAGE	POWER	HOSE LENGTH	PRESSURE	PACKAGE
DT-60-12V	60L	12V	300W	3M	1.3Bar	90x45X40CM
DT-60-24V	60L	24V	300W	3M	1.3Bar	90x45X40CM
DT-120-12V	115L	12V	300W	3.35M	1.3Bar	115x47X44CM
DT-120-24V	115L	24V	300W	3.35M	1.3Bar	115x47X44CM

DIESEL FUEL TANK

High-performance Rotational Moulding Diesel Fuel Oil Storage and Delivery KIT

- Pump 50 L/min flow rate with 30min duty cycle
- Hose and nozzle protect from padlock cover
- NBR delivery hose with crimped fittings
- Automatic Nozzle
- Fuel level indicator
- Impact Resistant Design
- Optional built-in battery power



DT-200



DT-430

TECHNICAL DATA

MODEL	CAPACITY	VOLTAGE	POWER	HOSE LENGTH	PRESSURE	WEIGHT	PACKAGE
DT-200	200L	12V/24V	300W	3.6M	1.3Bar	30/32KG	82×62×63CM
DT-430	430L	12V/24V	300W	4M	1.3Bar	51/55KG	102×82×92CM

DIESEL FUEL TANK

High-performance Rotational Moulding Diesel Fuel Oil Storage and Delivery KIT

- Pump 50 L/min flow rate with 30min duty cycle
- Hose and nozzle protect from padlock cover
- NBR delivery hose with crimped fittings
- Automatic Nozzle
- Fuel level indicator
- Impact Resistant Design
- Optional built-in battery power



DT-300



TECHNICAL DATA

MODEL	CAPACITY	VOLTAGE	POWER	HOSE LENGTH	PRESSURE	WEIGHT	PACKAGE
DT-300	240L	12V	300W	4M	1.3Bar	39/43KG	120×77×53CM
DT-300	240L	24V	300W	4M	1.3Bar	39/43KG	120×77×53CM

DIESEL FUEL TANK

- Hose and nozzle protect from padlock cover
- NBR delivery hose with crimped fittings
- Automatic Nozzle
- Fuel level indicator
- Impact Resistant Design
- Optional built-in battery power



DT-100A



DT-100D

TECHNICAL DATA

MODEL	CAPACITY	VOLTAGE	POWER	FLOW RATE	HOSE LENGTH	PRESSURE	WEIGHT	PACKAGE
DT-100A	100L	12V/24V	150W	20L/min	3.6M	3Bar	14/15.2KG	89×43×58CM
DT-100D	100L	12V/24V	300W	50L/min	4M	1.3Bar	15/16KG	89×43×58CM

ON-VEHICLE ELECTRIC SPRAYER

On-vehicle electric sprayer is designed for pest control, herbicides, growth regulators and liquid fertilizer spraying on farmland, nursery, garden, lawn, shrubs and grasses fences. Mounted on a small tractor, an ATV, an UTV or an agricultural flatbed car, and powered by the on-vehicle 12V power supply, the sprayer may be equipped with a gun or a lance to spray.



TECHNICAL DATA

MODEL	CAPACITY	VOLTAGE	POWER	FLOW RATE	HOSE LENGTH	PRESSURE
ST-50	50L	12V/24V/18V	60W	2.8L/min	4M	5.5Bar
ST-100	100L	12V/24V/18V	60W	2.8L/min	4M	5.5Bar